





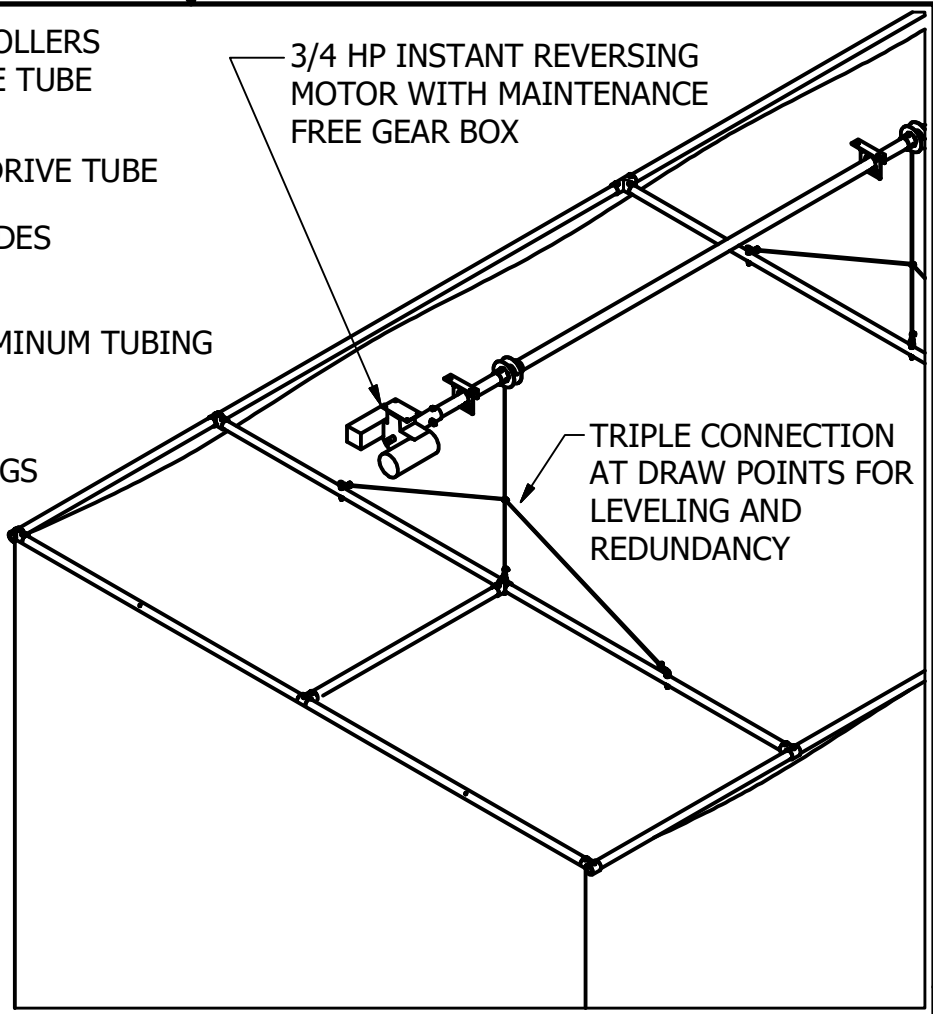

MOUNTING TO BUILDING STRUCTURE VIA 1/2" THREADED ROD AND STANDARD UNISTRUT CONNECTIONS AT BEAM LOCATIONS STANDARD.
OPTIONALLY SUSPENDED VIA 3/16" PROOF CHAIN AND PURLIN AND OR BEAM HANGERS.

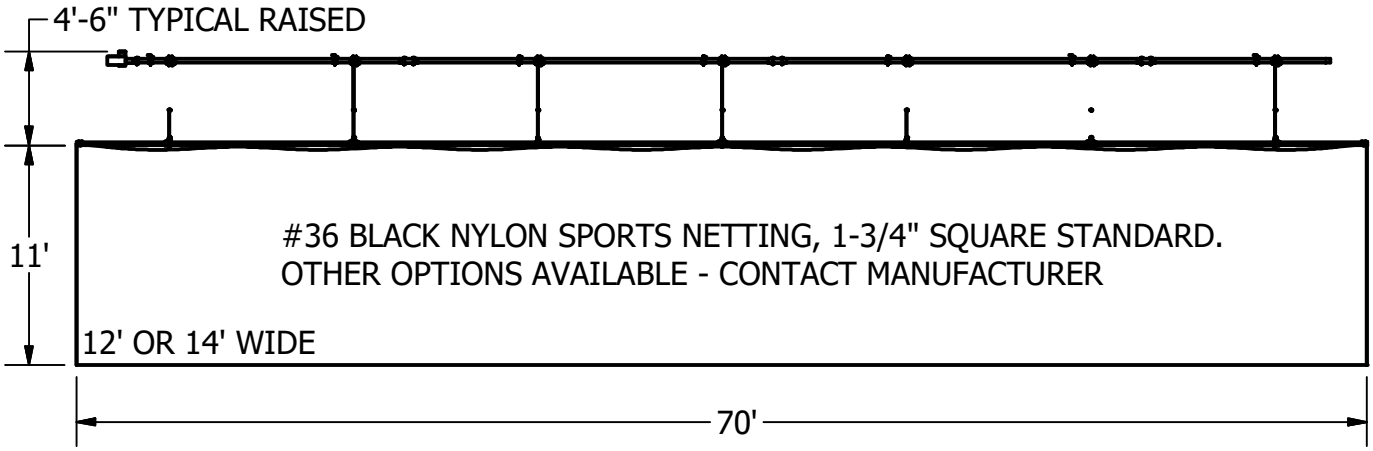

BC2160 - SPECIFICATION

BATTING CAGE, INDOOR
70X14X11, ELECTRIC

THIS PRINT IS THE PROPERTY OF GRAND SLAM SAFETY LLC AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

SPECTO®
WWW.GRANDSLAMSAFETY.COM

(315) 301-4039
PO BOX 35
9793 BRIDGE ST.
CROGHAN, NY 13327
USA

REV:A 9/19/2017

BC2160 - SPECIFICATION

BATTING CAGE TO BE 70' LONG X 14' WIDE X 11' HIGH. FOR CUSTOM SIZES PLEASE CONTACT MANUFACTURER.

SPECTO CAGE NET SIDES AND TOP SHALL BE 1-¾" BLACK #36 NYLON NETTING W/ ⅜" SEWN ROPE BORDER. NET WILL BE 12' HIGH TO ALLOW APPROXIMATELY 1' OF MATERIAL TO REST ON FLOOR TO RETAIN BALLS INSIDE NET. OTHER NETTING OPENING SIZES, WEIGHTS AND MATERIAL AVAILABLE UPON REQUEST.

THE CAGE WILL BE CAPABLE OF BEING LOWERED TO A HEIGHT WHICH ALLOWS THE SIDE NETTING TO BE PLACED ON TOP OF THE CAGE, THUS MINIMIZING THE STACK HEIGHT, THUS MAXIMIZING THE CLEARANCE UNDER IT WHEN IN THE RAISED POSITION.

CAGE UPPER SUPPORT FRAME SHALL BE 1-½" PIPE (1.90" OD) ALUMINUM OR ELECTRO GALVANIZED. JOINTS SHALL BE GALVANIZED MALLEABLE IRON FITTINGS SECURED WITH SET SCREWS AND OR SELF DRILLING SCREWS. FRAMEWORK SHALL BE SYMMETRICAL IN NATURE TO ALLOW UNIFORM 10' SPACING OF HORIZONTAL MEMBERS.

SUPPORT LINES SHALL CONSIST OF (7) ⅛" DIAMETER STEEL CABLES WITH 1800# BREAKING STRENGTH EACH. THE SUPPORT CABLES WILL BE SPACED TO ALIGN WITH THE SUPPORT FRAME HORIZONTAL MEMBERS. THE CABLE TERMINATE AT THE SUPPORT FRAME IN A "Y" SLING PATTERN TO OFFER (14) TOTAL ATTACHMENT POINTS AND OFFER STABILITY.

THE UPPER END OF THE SUPPORT LINES SHALL TERMINATE ON A 2-⅜" OD DRIVE LINE SHAFT. THE CABLE SHALL BE GUIDED ON THE DRIVE SHAFT VIA FLANGES. THE LINE SHAFT SHALL TURN ON BALL BEARING SUPPORTS MOUNTED NEXT TO THE CABLE ATTACHMENT POINTS, CAPABLE OF BEING ATTACH TO THE BUILDING STRUCTURE VIA THREADED ROD OR 3/16 GRADE 30 CHAIN. ATTACHMENT HARDWARE SHALL BE SUPPLIED BY THE MANUFACTURER.

THE DRIVE SHAFT SHALL BE DRIVEN BY AN INSTANTLY REVERSING 115 VOLT ¾ HP MOTOR GOVERNED TO STALL AT 14 AMP TO PREVENT OVERLOAD. THE GEAR BOX SHALL BE SEALED GEAR CASE TYPE WITH PREMIUM SEALS FOR LIFETIME MAINTENANCE FREE OPERATION.

A 3-POSITION KEY SWITCH WITH WALL PLATE SHALL BE SUPPLIED WITH EACH KIT. WIRING TO BE COMPLETED BY OTHER.

BC2160 - SPECIFICATION
BATTING CAGE, INDOOR
70X14X11, ELECTRIC

THIS PRINT IS THE PROPERTY OF GRAND SLAM SAFETY LLC AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

SPECTO®
WWW.GRANDSLAMSAFETY.COM

(315) 301-4039
PO BOX 35
9793 BRIDGE ST.
CROGHAN, NY 13327
USA